

# SML-10-TREE MOUNT


## SML-10



YYZ TREE MOUNTED LIGHT Mono is high brightness and easy installation for Landscape solution. Available in different wattage. IP65, UV-resistant.

### FEATURES

|                 |                               |
|-----------------|-------------------------------|
| NO OF HEAD      | 4/6                           |
| FINISH          | BLACK /GREY/BRONZE            |
| WORKING VOLTAGE | 220-240 VAC                   |
| RATED POWER     | 4x10W / 6x10W                 |
| RADIANCE ANGLE  | 13°/23°/38°                   |
| LAMP LIFE       | 50000 HRS                     |
| MOUNTING        | TREE MOUNTED BRACKET          |
| CONNECTION      | OUTDOOR RATED CONNECTIONS     |
| DIMENSIONS      | Ø800 x 60 x 10 + Ø75 x 150 mm |
| OPERATION TEMP  | -20° C - +50° C               |
| STORAGE TEMP    | -20° C - +60° C               |
| CABLE           | H05RN 1 Mtr PIG TAIL          |
| BODY            | ALUMINUM 6063                 |



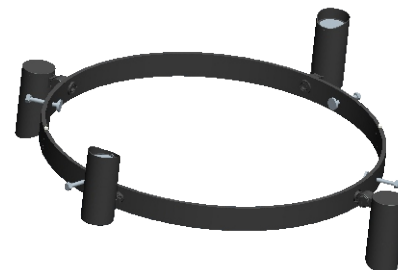


- CREE LED Quality
- 220-240 VOLTS Working Voltage
- 4x10W / 6x10W Rated power

### ELECTRICAL DATA

|                   |                             |
|-------------------|-----------------------------|
| POWER CONSUMPTION | 4x10W / 6x10W               |
| SUPPLY VOLTAGE    | 220-240 VAC INTEGRAL DRIVER |
| CRI               | 80+                         |
| LEDS              | CREE COB                    |
| LUMENS            | 420lm / HEAD                |

### DRAWING

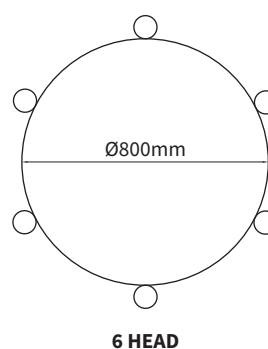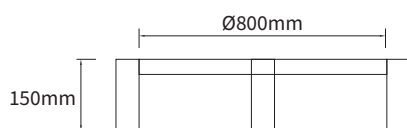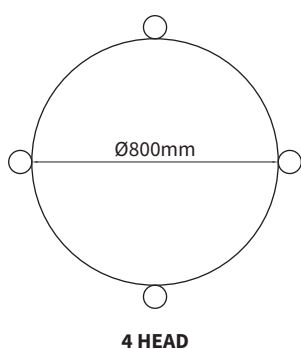

### ORDERING LOGIC

| PRODUCT | WATTAGE           | COLOR TEMPARTURE | OPTIC  | VOLTAGE  | FINISH      | CONNECTION                             | CUSTOM        |
|---------|-------------------|------------------|--------|----------|-------------|--|---------------|
| SML 10  | 40 - 4x10W(4Head) | (CT27)           | 2700K  | 13 - 13° | 220-240 VAC | BK - Black<br>GR - Grey<br>BR - Bronze | PT - Pig Tail |
|         | 60 - 6x10W(6Head) | (CT30)           | 3000K  | 23 - 23° |             |  |               |
|         |                   | (CTXX)           | Custom | 38 - 38° |             |  |               |

Sample: SML 10 - 40 - CT27 - 13 - 220-240 - BK - PT - XX