## **GENESIS PENDANT LINEAR**



## **GNS-PL**



IP20

CE

YYZ GENESIS PENDANT LINEAR series with the innovation linear lighting technology, provided two different illumination method, more choice for power and light distribution, UGR≤12 anti-glare design, apply to high quality, high efficiency office environment.

## **FEATURES**

FINISH WORKING VOLTAGE 220-240V 50/60Hz

RATED POWER

NARROW, MEDIUM, WIDE, OVAL FLOOD DISTRIBUTION

LAMP LIFE 50,000 HRS MOUNTING HANGING **DIMENSIONS** 1600x41x80mm -20° C - +50° C **OPERATION TEMP** CONTROL ON/OFF, 1-10V, DALI

# BLACK, WHITE, GREY 65/71W


## **ELECTRICAL DATA**


POWER CONSUMPTION 65/71W SUPPLY VOLTAGE 220-240VAC

COLORS 3000K, 4000K, 5000K

80+ CRI LUMEN 82lm/W

## **DIMENSIONS**

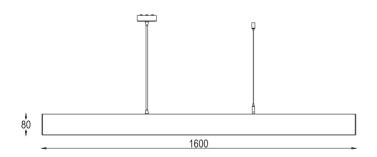





Darklight



Linear spread lens



### **ORDERING LOGIC**

PRODUCT	WATTAGE	COLOR TE	MPERATURE	CONTROL	VOLTAGE	OPTIC		FINISH	ACCESSORIES		CUSTOM	
GNS-PL	65 - 65W	(CT30)	3000K	ON/OFF	240VAC	N	-	Narrow	BK - Black	LSL -	Linear Spread Lens	XX
	71 - 71W	(CT40)	4000K	1-10V		М	-	Medium	WH - White			
		(CT50)	5000K	DALI		W	-	Wide	GR - Grey			
						0	-	Oval Flood				

Sample: GNS-PL - 65 - CT30 - ON/OFF - 240 - N - BK - LSL - XX