

OPERA GENERAL DOWNLIGHT

OPAGL 155

Mono IP20/IP44 **CE**

YYZ Opera general downlight series are best suited for architectural in addition to general lighting since it enables symmetrical light distribution to get an effective task, accent or general lighting. Wide range of wattage options from 7W to 42W are available making it versatile for applications with mounting heights from 2.8m to 10m. It has carefully designed optics that ensure UGR<19 even with ultra-wide distribution.

FEATURES

MATERIAL	Aluminum
FINISH	White, Black
RATED POWER	28/32W
WORKING VOLTAGE	220-240V 50/60Hz
RADIANCE ANGLE	Wide, Ultra wide
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø155x138mm(CutoutØ145mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali



LUMILEDS/CITIZEN
LED Quality


240 VOLTS
Working Voltage

28/32W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	28/32W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+, SDCM<3
LUMEN	90lm/W

DIMENSIONS

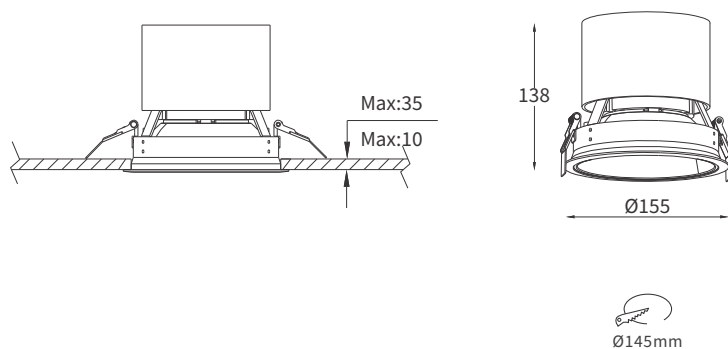

Linear Spread Lens



Spread Lens



ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES	IP RATING	
OPAGL 155	28 - 28W	(CT27)	2700K	240VAC	W - Wide	BL - Black	LSL - Linear Spread Lens	IP20	
	32 - 32W	(CT30)	3000K		TRIAC	U - Ultra Wide	WH - White	SL - Spread Lens	IP44
		(CT35)	3500K		1-10V				
		(CT40)	4000K		DALI				

Sample: OPAGL 155 - 28 - CT27 - ON/OFF - 240 - W - BL - LSL - IP20