

YYZ Dimple is a linear sleek recessed slot light with a trim and interior curve feature. The luminaire can be installed both vertically and horizontally to form continuous or individual rows. It is made from 100% recyclable, extruded architectural grade T6061 aluminum and is with several LED lamping options including multiple outputs and CCTs, tunable white and colour changing RGB+White. A Low UGR option with a prismatic lens is also available.

FEATURES

HOUSING	100% Recyclable, extruded architectural grade t6061 aluminium
RATED POWER	12/13.4/14/22/25/44.6W/mtr
BEAM ANGLE	120°
MOUNTING	Recessed
OPTIC	Opal diffuser
DIMENSIONS	54 mm x 57 mm
OPERATION TEMP	-20° C - +40° C
LAMP LIFE	50,000 hrs
AVAILABLE LENGTH	600, 1200, 1800, 2400, 3000, 3400, 4500, 5000mm
CONTROL	0-10V, 1-10V, Dali, Dmx, Non dimmable, Phase dim



CREE
LED Quality


V 24VDC
Working Voltage

W 12/13.4/14/22/25/44.6W/Mtr
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	12W(965lm/m)/13.4W(1380lm/m)/14W(2691lm/m)/22W(4446lm)/25W(1108lm/m)/44.6W(1570lm/m)/RGBW(326lm/m [white only])
COLORS	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+ /90+

DIMENSION

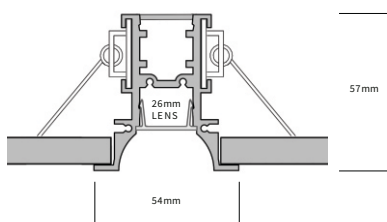

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	FINISH	CRI	OPTIONS
DPL RM-TRIMLESS	12 - 12W/Mtr	(CT27) 2700K	0-10V	AL - Aluminium natural	80	EM - 3 Hour Emergency Kit-Remote
DPL RM TR - WITH TRIM	13.4 - 13.4W/Mtr	(CT30) 3000K	1-10V	BK - Black powder coat	90	PIR-A - PIR Absence Detector - remote
	14 - 14W/Mtr	(CT35) 3500K	DALI	WH - White powder coat		PIR-P - PIR Presence Detector - remote
	22 - 22W/Mtr	(CT40) 4000K	NON DIM	RAL - RAL powder coat		DPIR - DALI PIR Sensor
	25 - 25W/Mtr	(CT50) 5000K	DMX	BR - Bronze powder coat		(XX) - Custom
	44.6 - 44.6W/Mtr	(CT65) 6500K	PHASE DIM			
		(RGBW) RGBW				
		(CTXX) CUSTOM				

Sample: DPLRM - 12 - CT 27 - 0-10V - AL - 80 - EM