WET RATED LFX COB SERIES

LFX-W-10.00-CTXX-COB-Z3-840-24-CV-10-H-1-HT-RMTLWL05











YYZ LFX COB IP54 series features excellent homogenous light, without visible light points. The COB strip is a high-density led lighting strip made by COB encapsulation, which can reduce the thermal resistance of the high-density strip circuit system, greatly improves the life of the LED, and the light flux density is high, the glare is small, and the light is uniform. These series is perfect for indirect lighting and hence used in offices, residential interiors, furniture, or places which require large luminous surface.

FEATURES

LIGHT SOURCE COB

LED QUANTITY 840 Leds / mtr **FINISH** White PCB WORKING VOLTAGE 24 Volts RATED POWER 10W / mtr 180° RADIANCE ANGLE LAMP LIFE 50000 hrs

MOUNTING 3M Tape on the back CONNECTION Hardwired tails **CUTTING INCREMENTS** Every 50mm **DIMENSIONS** 5000 x 10mm MAX DAISY RUN 5 mtr















ELECTRICAL DATA

POWER CONSUMPTION 10.0W SUPPLY VOLTAGE 24 Vdc **SUPPLY CURRENT** 240V ac **COLORS** 2700+6500 CRI >90 LUMEN 700-950lm

ORDERING LOGIC

PRODUCT SERIES	ТҮРЕ	POWER	COLOR TEMPER	ATURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	РСВ	CRI	NO OF LED ROWS	CONNECTION	
LFX	W - WetRated (IP54)	10.00 - 10.0W	(CT27) (CT65)	2700K 6500K	COB	Z3	840 - 840 LEDs/mtr	24-24V	CV-Constant 1 voltage	10 - 10mm	H - HIGH (90)	1	HT - Hardwired Tail	
									MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL
									R - Regular	M - Mono	T - Top	L - Low	W - White	L05 - 5mtr


Sample: LFX - W - 10.00 - CT 27 - COB - Z3 - 840 - 24 - CV - 10 - H -1 - HT - RMTLWL05








DIMENSIONS

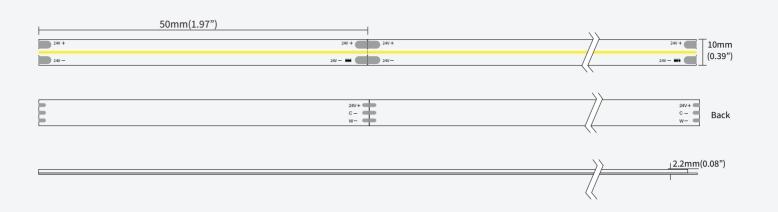

BINNING DIAGRAM

BIN Details



ACCESSORIES

Surface mounted













1616 1616B

Corner installation

Recessed installation



Built-in installation