



YYZ Uniflex is a type of cost effective high performance lighting designed to provide consistent illumination to accentuate any structure/building facade. Its housing is made of high quality silicon and is UV resistant which is perfectly suitable for outdoor rated applications. This IP67 rated fixture provides seamless and uniform dot free light output and is constructed with high performance SMD led's behind an eco-friendly UV-resistant PVC encapsulated flexible chamber material. The connectors at both the end ensure reliable installation. Its normally supplied in 5 meter standard rolls or can be custom-made according to the requirement.



FEATURES


LED TYPE	2835
FINISH	Robust housing with high quality silicon, UV proof
WORKING VOLTAGE	24V dc
RATED POWER	18W/mtr
BEAM ANGLE	120°
LAMP LIFE	60,000 hrs
MOUNTING	Surface mount
CONNECTION	Outdoor rated connections
DIMENSIONS	13(W) x 7mm(H)
BENDING	Horizontal bending
OPERATION TEMP	-25° C - +50° C
STORAGE TEMP	-30° C - +80° C
CONTROL	On/Off, 0-10V

- 2835 CREE**
LED Quality
- 24 VDC**
Working Voltage
- 18W/Mtr**
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	18W/mtr
SUPPLY VOLTAGE	24V dc
CRI	90
LEDS	Cree
COLORS	2200K/2400K/2700K/3000K/4000K/5000K/6000K

DIMENSIONS

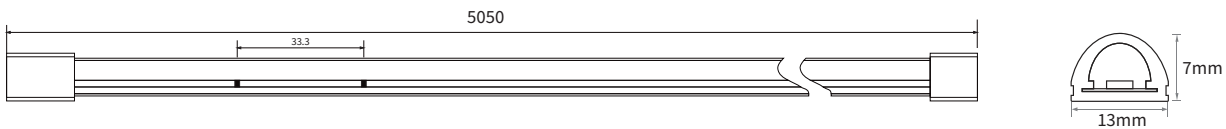

ORDERING LOGIC

PRODUCT	CONTROL	WATTAGE	COLOR TEMPERATURE	VOLTAGE	CONNECTION	CUSTOM	
UNIFLEX	ND - NON DIMMABLE 0-10V	18 - 18W	(CT 22)	2200K	24 - 24 VDC	OC - OUTDOOR CONNECTOR	XX - XXX
			(CT 24)	2400K			
			(CT 27)	2700K			
			(CT 30)	3000K			
			(CT 40)	4000K			
			(CT 50)	5000K			
			(CT 60)	6000K			
			(CTXX)	CUSTOM			

Sample: UNIFLEX - ND - 18 - CT22 - 24 - OC - XX