

RECESSED LINEAR DOWNLIGHT- TRIMLESS


LRD TRIMLESS-8-N-CT27-ND-BK-H-XX



YYZ Linear Recessed downlight are rectangular shaped luminaire which provides two different light distribution options to lighting designs, flexible lighting solution with high illumination and visual comfort. Linear light is an ideal solution for high requirements of glare control which can be applied in offices, public area, commercial area, restaurants, and other applications.

FEATURES

| | |
|-----------------|----------------------------------|
| MATERIAL | Aluminum |
| FINISH | White |
| RATED POWER | 8/11 W |
| WORKING VOLTAGE | AC220 - 240 V 50/60Hz |
| RATED CURRENT | 180 mA / 250 mA |
| NO OF LED | 3 LED |
| RADIANCE ANGLE | Narrow, Medium, Wide, Oval Flood |
| MOUNTING | Ceiling recessed |
| CONNECTION | Indoor rated connections |
| LAMP LIFE | 35000 - 50000 hrs |
| DIMENSION | 100x68x97mm(cutout104x50mm) |
| OPERATING TEMP | -20° C - +50° C |
| CONTROL | On/Off, 1-10V, Dali, Triac |



BRIDGELUX
LED Quality

AC 220-240V
Working Current

8/11W
Rated power

ELECTRICAL DATA


| | |
|-------------------|-----------------------|
| POWER CONSUMPTION | 8/11 W |
| SUPPLY VOLTAGE | AC220 - 240 V 50/60Hz |
| COLORS | 2700K / 3000K / 4000K |
| CRI | 90 |



Regular
Darklight

Optional
Black

DIMENSION

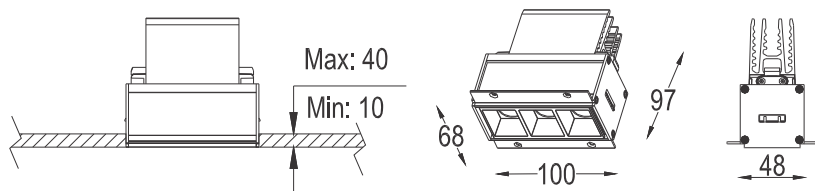

L104*W50*H140mm

Max:40mm

Oval Flood



Downlights



ORDERING LOGIC

| PRODUCT | WATTAGE | BEAM ANGLE | COLOR TEMPERATURE | CONTROL | FINISH | CRI | CUSTOM |
|--------------|----------|----------------|-------------------|-------------|------------|--------------|----------|
| LRD TRIMLESS | 8 - 8W | N - Narrow | (CT27) 2700K | ND - ON/OFF | BK - Black | H - High(90) | XX - XXX |
| | 11 - 11W | M - Medium | (CT30) 3000K | TR - TRIAC | WH - White | | |
| | | W - Wide | (CT40) 4000K | AN - 1-10V | | | |
| | | O - Oval Flood | | DA - DALI | | | |

Sample:LRD TRIMLESS - 8 - N - CT27 - ND - BK - H - XX