

RECESSED LINEAR DOWNLIGHT- TRIMLESS

LRD TRIMLESS-15-N-CT27-ND-BK-H-XX



YYZ Linear Recessed downlight are rectangular shaped luminaire which provides two different light distribution options to lighting designs, flexible lighting solution with high illumination and visual comfort. Linear light is an ideal solution for high requirements of glare control which can be applied in offices, public area, commercial area, restaurants, and other applications.

FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	15/20 W
WORKING VOLTAGE	AC220 - 240 V 50/60Hz
RATED CURRENT	350 mA / 500 mA
NO OF LED	6 LED
RADIANCE ANGLE	Narrow, Medium, Wide, Oval Flood
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	35000 - 50000 hrs
DIMENSION	190x68x97mm(cutout194x50mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac



- BRIDGELUX LED Quality
- AC 220-240V Working Current
- 15/20W Rated power



ELECTRICAL DATA

POWER CONSUMPTION	15/20 W
SUPPLY VOLTAGE	AC220 - 240 V 50/60Hz
COLORS	2700K / 3000K / 4000K
CRI	90+



Regular Darklight Optional Black

DIMENSION

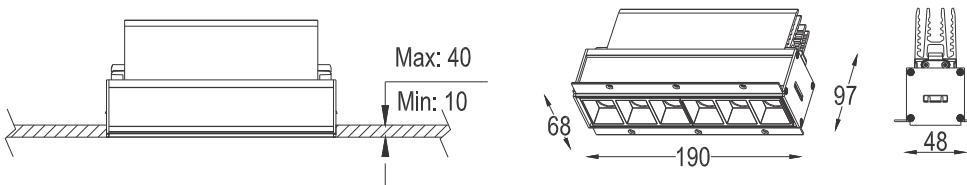

- L194*W50*H140mm
- Max:40mm

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	CONTROL	FINISH	CRI	CUSTOM
LRD TRIMLESS	15 - 15W	N - Narrow	(CT27) 2700K	ND - ON/OFF	BK - Black	H - High(90)	XX - XXX
		M - Medium	(CT30) 3000K	TR - TRIAC	WH - White		
	W - Wide	(CT40) 4000K	AN - 1-10V				
	O - Oval Flood		DA - DALI				

Sample: LRD TRIMLESS - 15 - N - CT27 - ND - BK - H - XX