

RECESSED LINEAR WALLWASHER- TRIM

LRW TRIM-15-A-CT27-ND-BK-H-XX



YYZ Linear Recessed wallwasher gives architects and lighting designers creative design and abundant light environment. It has two options of installation, recessed and trimless mounted. Trimless design make ceiling integrated in high-quality application. In the aspect of optical, symmetrical, and asymmetrical lighting distribution apply to a variety of application. Linear light an ideal solution for high requirements of glare control for office project (UGR12), specially designed asymmetrical lighting distribution for wall washing effect apply to hotels, restaurants, public facilities, and office, etc.



FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	15/20 W
WORKING VOLTAGE	AC220 - 240 V 50/60Hz
RATED CURRENT	350 mA / 500 mA
NO OF LED	6 LED
RADIANCE ANGLE	Assymetric
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	35000 - 50000 hrs
DIMENSION	209x61x99mm(cutout 200x50mm)
OPERATIN TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Triac

BRIDGELUX
LED Quality

AC 220-240V
Working Current


15/20W
Rated power



ELECTRICAL DATA

POWER CONSUMPTION	15/20 W
SUPPLY VOLTAGE	AC220 - 240 V 50/60Hz
COLORS	2700K / 3000K / 4000K
CRI	90+

DIMENSION

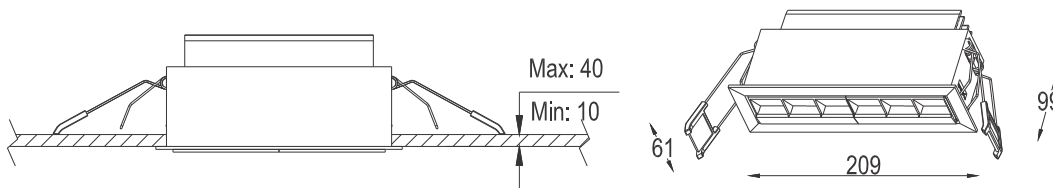

- L200*W50*H140mm
- Max:40mm

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	CONTROL	FINISH	CRI	CUSTOM	
LRW TRIM	15 - 15W	A - Assymetric	(CT27)	2700K	ND - ON/OFF	BK - Black	H - High(90)	XX - XXX
			(CT30)	3000K	TR - TRIAC	WH - White		
	20 - 20W		(CT40)	4000K	AN - 1-10V			
					DA - DALI			

Sample: LRW TRIM - 15 - A - CT27 - ND - BK - H - XX