

SMDLCH SURFACE MOUNTED LIGHT

SMDLCH DD15075

Mono IP20/IP65 C E

YYZ SMDLCH is surface mounted LED downlight where the light source is housed in a box, this light box is suitable for all commercial lighting applications as well as public indoor, outdoor space and is available in white and black finishes.



FEATURES

MATERIAL	Die-cast aluminum
FINISH	White, Black
WORKING VOLTAGE	220-240V ac 50/60Hz
RATED POWER	2x6W
BEAM ANGLE	40
LAMP LIFE	50,000 hrs
MOUNTING	Surface mounted
CONNECTION	Indoor and outdoor rated connections
DIMENSIONS	150 x 75x160mm
OPERATION TEMP	-30° C - +50° C
CONTROL	On/Off, Dali

CREE
LED Quality


220 VOLTS
Working Voltage

15W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	2x6W
SUPPLY VOLTAGE	220-240Vac
COLORS	2700K, 3000K, 4000K
CRI	≥80
LUMEN	90 lm/W

DIMENSIONS

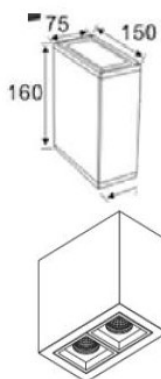

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	VOLTAGE	FINISH	IP	CUSTOM
SMDLCHDD15075	12 - 2x6W	40 - 40°	(CT27) 2700K	240 - 240VAC	WH - White	20 - IP20	XX - XXXX
			(CT30) 3000K		BK - Black		
			(CT40) 4000K				

Sample: SMDLCHDD15075 - 12 - 40 - CT 27 - 240 - WH - 20 - XX