

CORAL

CRL-SQ

Mono IP54 CE

YYZ Coral downlights are specially designed for wet area applications like jacuzzi, toilets, balcony, exterior entrance that demands water proof construction and resistance to corrosion. Wide range of beam angle to cater to application specific requirements. Powered by high efficiency COB LED chip with its consistent performance ensured through a reliable heat sink.


FEATURES

BODY	Die-cast aluminum
FINISH	White, Black, Silver
WORKING VOLTAGE	100-240V 50/60Hz
RATED POWER	8W
RADIANCE ANGLE	20°, 40°, 60°
LAMP LIFE	50,000 hrs
MOUNTING	Ceiling recessed
DIMENSIONS	90x90mm(Cutout 83x83mm)
OPERATION TEMP	-30° C - +50° C
CONTROL	Dali, 0-10V, Triac

ELECTRICAL DATA

POWER CONSUMPTION	8W
SUPPLY VOLTAGE	100-240Vac
COLORS	2700K, 3000K, 4000K, 5000K
CRI	90
LUMEN	90lm/W

DIMENSIONS

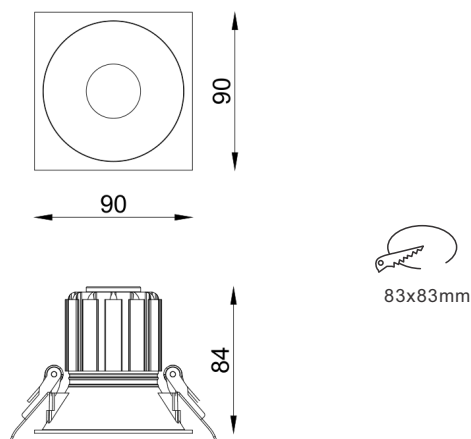

- CREE LED Quality
- 240 V AC Working Voltage
- 8W Rated power

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE		VOLTAGE	BEAM ANGLE	FINISH
CRL-SQ	8 - 8W	(CT27)	2700K	AC - 240VAC	20 - 20°	WH - White
		(CT30)	3000K		40 - 40°	BK - Black
		(CT40)	4000K		60 - 60°	SL - Silver
		(CT50)	5000K			

Sample: CRL-SQ - 8 - CT27 - AC - 20 - WH