

# CORAL

## CRL-SQ

Mono IP54 CE

YYZ Coral downlights are specially designed for wet area applications like jacuzzi, toilets, balcony, exterior entrance that demands water proof construction and resistance to corrosion. Wide range of beam angle to cater to application specific requirements. Powered by high efficiency COB LED chip with its consistent performance ensured through a reliable heat sink.


### FEATURES

|                 |                           |
|-----------------|---------------------------|
| BODY            | Die-cast aluminum         |
| FINISH          | White, Black, Silver      |
| WORKING VOLTAGE | 100-240V 50/60Hz          |
| RATED POWER     | 15W                       |
| RADIANCE ANGLE  | 15°, 24°, 38°             |
| LAMP LIFE       | 50,000 hrs                |
| MOUNTING        | Ceiling recessed          |
| DIMENSIONS      | 108x108mm(Cutout 98x98mm) |
| OPERATION TEMP  | -30° C - +50° C           |
| CONTROL         | Dali, 0-10V, Triac        |

### ELECTRICAL DATA

|                   |                            |
|-------------------|----------------------------|
| POWER CONSUMPTION | 15W                        |
| SUPPLY VOLTAGE    | 100-240Vac                 |
| COLORS            | 2700K, 3000K, 4000K, 5000K |
| CRI               | 90                         |
| LUMEN             | 90lm/W                     |

### DIMENSIONS

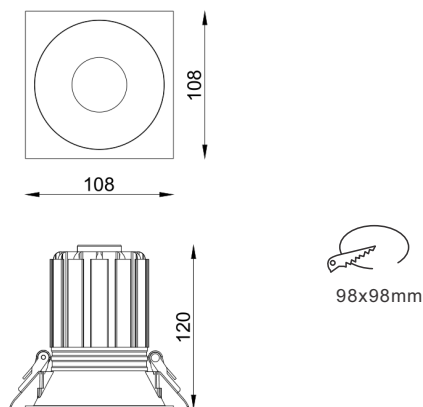

- CREE LED Quality
- 240 V AC Working Voltage
- 15W Rated power

### ORDERING LOGIC

| PRODUCT | WATTAGE  | COLOR TEMPERATURE |       | VOLTAGE     | BEAM ANGLE | FINISH      |
|---------|----------|-------------------|-------|-------------|------------|-------------|
| CRL-SQ  | 15 - 15W | (CT27)            | 2700K | AC - 240VAC | 15 - 15°   | WH - White  |
|         |          | (CT30)            | 3000K |             | 24 - 24°   | BK - Black  |
|         |          | (CT40)            | 4000K |             | 38 - 38°   | SL - Silver |
|         |          | (CT50)            | 5000K |             |            |             |

Sample: CRL-SQ - 15 - CT27 - AC - 15 - WH