OUTDOOR LED STRIP DIM2 WARM FLEX SERIES



LFX-O-9.6-CTWD-1828-Z9-168-24-CV-10-H-1-HT-R-M-T-L-W-L05











Our LFX series flexible linear LED light strips is a simple, effective solution for a wide range of lighting applications where crisp, single color light is desired. Ideal for indirect accent lighting, as well as a store fixtures, display cases, steps and stairwells, furniture, kitchen and cabinet lighting, along with other task and specialty applications.

FEATURES

LIGHT SOURCE 1828 LED LED QUANTITY 168 LEDS / m FINISH WHITE PCB WORKING VOLTAGE 24 V DC RATED CURRENT 200mA RATED POWER 9.6W / m RADIANCE ANGLE 120° LAMP LIFE 50000 HRS

MOUNTING 3M TAPE ON THE BACK
CONNECTION HARDWIRED TAILS
CUTTING INCREMENTS EVERY 83.33 mm
DIMENSIONS 10mm X 5000mm(PCB)

MAX DAISY RUN 5 m












ELECTRICAL DATA

POWER CONSUMPTION 9.6W
SUPPLY VOLTAGE 24 V DC
SUPPLY CURRENT 200mA
COLORS 1800-3000K
LEDS / 3.3FT 168

DIMENSIONS

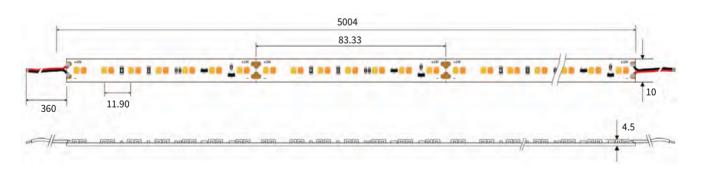

ORDERING LOGIC

PRODUCT SERIES	ТҮРЕ	POWER	COLOR TEMPERATURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	WIDTH	CRI	NO OF LED ROWS	CONNECTION	
LFX	O - Outdoor (IP65)	9.6 - 9.6W	(CTWD) 1800-3000K	1828	Z9	168 - 168 LEDs/mtr	24-24V	CV-Constant voltage	10 - 10mm	H - High (90)	1	HT - Hardwired Tai OC - Outdoor Connector	
								MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL
								R - Regular	M - Mono	Т - Тор	L - Low	W - White	L05 - 5mtr