

# DOME SERIES

## DOE-R75

Mono IP54 CE

YYZ Dome series of architectural downlight features glare free performance with the ultra wide beam angle. Available in variety of sizes to accommodate wattage. Making it versatile for applications with ceiling heights.

### FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	7.5W, 11W
WORKING CURRENT	250mA, 350mA
RADIANCE ANGLE	25°, 50°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø84 x 72mm (Cutout Ø75mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	Non-Dim, 1-10V, Dali



CITIZEN  
LED Quality


250mA/350mA  
Working Current

7.5W/11W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	7.5W, 11W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	80, 90
LUMEN	700-750lm @ 7.5W, 900-950lm @ 11W

### DIMENSIONS

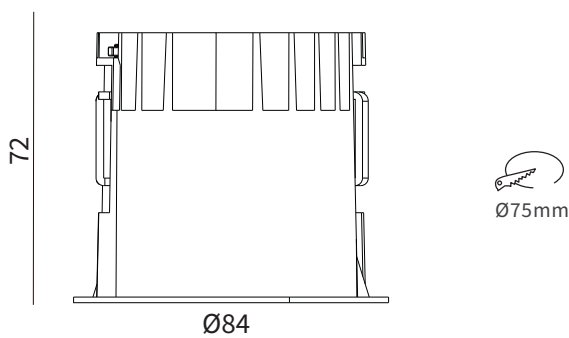

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	REFLECTOR FINISH	
DOE R75	7.5 - 7.5W	(CT27)	2700K	25 - 25°	WH - White	MA - Matt
	11 - 11W	(CT30)	3000K	50 - 50°	XX - Custom	WH - White
		(CT40)	4000K			BK - Black

Sample: DOER 75 - 7.5 - CT27 - 25 - WH - MA