

DOME SERIES

DOE-R100 L

Mono IP54 CE

YYZ Dome series of architectural downlight features glare free performance with the ultra wide beam angle. Available in variety of sizes to accommodate wattage. Making it versatile for applications with ceiling heights.

FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	12W
WORKING CURRENT	350mA
RADIANCE ANGLE	90°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø112 x 53mm (Cutout Ø100mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	Non-Dim, 1-10V, Dali



SAMSUNG
LED Quality


350mA
Working Current

12W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	12W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	80, 90
LUMEN	1300-1400lm @ 12W

DIMENSIONS

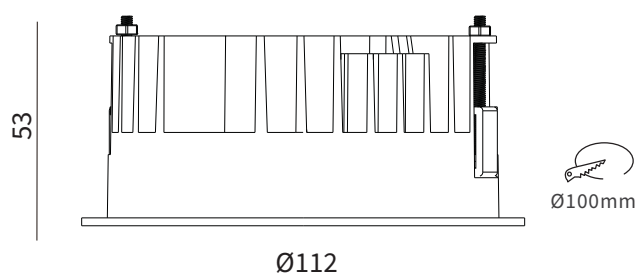

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	REFLECTOR FINISH	
DOE R 100L	12 - 12W	(CT27)	2700K	90 - 90°	WH - White	MA - Matt
		(CT30)	3000K		XX - Custom	WH - White
		(CT40)	4000K			BK - Black

Sample: DOE R 100L - 12 - CT27 - 90 - WH - MA