

DOME SERIES

DOE-R150

Mono IP54 CE

YYZ Dome series of architectural downlight features glare free performance with the ultra wide beam angle. Available in variety of sizes to accommodate wattage. Making it versatile for applications with ceiling heights.

FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	18W, 25W
WORKING CURRENT	500mA, 700mA
RADIANCE ANGLE	30°, 60°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø162 x 100mm (Cutout Ø150mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	Non-Dim, 1-10V, Dali



CITIZEN
LED Quality


500mA/700mA
Working Current

18W/25W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	18W, 25W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	80, 90
LUMEN	2000-2500lm @ 18W, 2700-3300lm @ 25W

DIMENSIONS

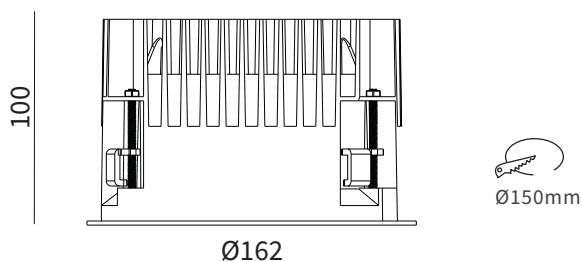

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	REFLECTOR FINISH
DOE R 150	18 - 18W	(CT27) 2700K	30 - 30°	WH - White	MA - Matt
	25 - 25W	(CT30) 3000K	60 - 60°	XX - Custom	WH - White
		(CT40) 4000K			BK - Black

Sample: DOE R 150 - 18 - CT27 - 30 - WH - MA