

DOME SERIES

DOE-SQ200

Mono IP54 CE

YYZ Dome series of architectural downlight features glare free performance with the ultra wide beam angle. Available in variety of sizes to accommodate wattage. Making it versatile for applications with ceiling heights.

FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	25W, 38W
WORKING CURRENT	700mA, 1050mA
RADIANCE ANGLE	70°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	220x220 x 132mm (Cutout 200x200mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	Non-Dim, 1-10V, Dali



CITIZEN
LED Quality


700mA/1050mA
Working Current

25W/38W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	25W, 38W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	80, 90
LUMEN	2200-2400lm @ 25W, 3200-3400lm @ 38W

DIMENSIONS

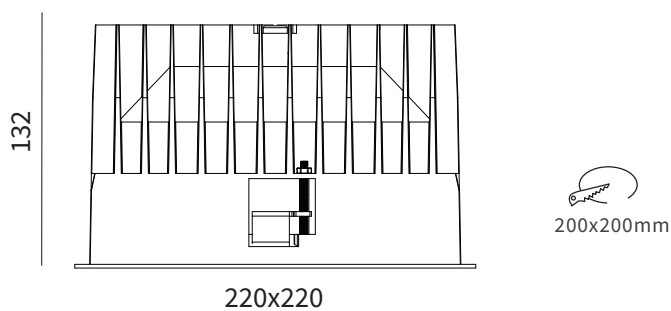

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	REFLECTOR FINISH
DOE SQ 200	25 - 25W	(CT27) 2700K	70 - 70°	WH - White	MA - Matt
	38 - 38W	(CT30) 3000K		XX - Custom	WH - White
		(CT40) 4000K		BK - Black	

Sample: DOE SQ 200 - 25 - CT27 - 70 - WH - MA