

TUSKER DOWNLIGHT

TSR-140

Mono IP40 CE

YYZ Tusker downlight series are anti-glare architectural lighting with symmetric light distribution having UGR≤19. It has beautifully shaped PC reflector that uses an innovative technology and is available in a high polish or matte version.

FEATURES

MATERIAL	Aluminum
FINISH	White, Black
RATED POWER	10W, 18W, 24W
WORKING CURRENT	250mA, 500mA
BEAM ANGLE	30°, 45°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs, 100,000 Hrs (CLO driver)
DIMENSION	Ø140x105mm (Cutout Ø120mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali
MacAdam	3SDCM (Standard), 2SDCM (On request)



NICHIA/CREE/SAMSUNG/LUMILEDS/OSRAM
LED Quality


250mA/500mA
Working Current

10W/18W/24W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	10W, 18W, 24W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	120lm/W

DIMENSIONS

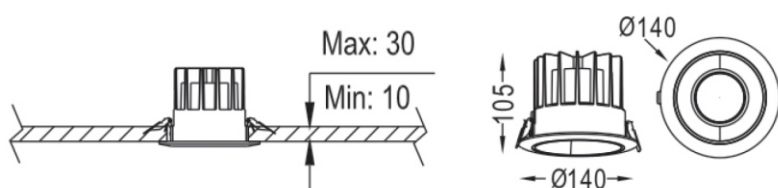

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	CURRENT	BEAM ANGLE	FINISH	CUSTOM	
TSR-140	10 - 10W	(CT27)	2700K	SW - ON/OFF	25 - 250 mA	30 - 30°	BK - Black	xx
	18 - 18W	(CT30)	3000K	AN - 1-10V	50 - 500 mA	45 - 45°	WH - White	
	24 - 24W	(CT35)	3500K	DA - DALI				
		(CT40)	4000K					

Sample: TSR-140 - 10 - CT27 - SW - 25 - 30 - BK - XX