

CARL SERIES

CRL 84

Mono IP20 CE

YYZ Carl series of architectural downlight features glare free performance with UGR ≤ 17 even for the ultra wide beam angle. Available in variety of sizes to accommodate wattage range.

FEATURES

MATERIAL	Die-cast aluminum
FINISH	White, Black
RATED POWER	12W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	15°, 24°, 38°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø84 x 105mm (Cutout Ø75mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, 0-10V, Triac, Dali



CREE LED Quality


220-240V AC Working Voltage

12W Rated power

ELECTRICAL DATA

POWER CONSUMPTION	12W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K, 5000K
CRI	80, 90

DIMENSIONS

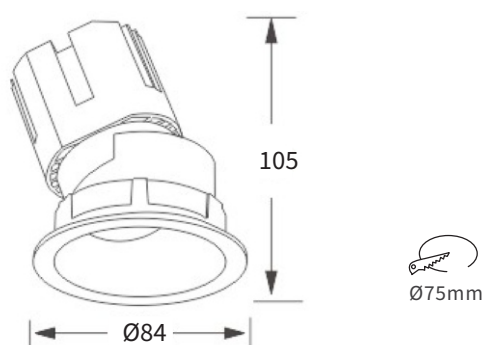

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	ACCESSORIES	
CRL 84	12 - 12W	(CT27)	2700K	15 - 15°	BK - Black	HCL - Honeycomb louver
		(CT30)	3000K	24 - 24°	WH - White	STL - Stretch lens
		(CT40)	4000K	38 - 38°	XX - Custom	SL - Soft lens
		(CT50)	5000K			CL - Clear lens

Sample: CRL 84 - 12 - CT27 - 15 - BK - HCL