

# CARL SERIES

## CRL 110

Mono IP20 CE

YYZ Carl series of architectural downlight features glare free performance with UGR ≤ 17 even for the ultra wide beam angle. Available in variety of sizes to accommodate wattage range.

### FEATURES

MATERIAL	Die-cast aluminum
FINISH	White, Black
RATED POWER	20W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	15°, 24°, 38°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø110 x 131mm (Cutout Ø95mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, 0-10V, Triac, Dali



CREE LED Quality


220-240V AC Working Voltage

20W Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	20W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K, 5000K
CRI	80, 90

### DIMENSIONS

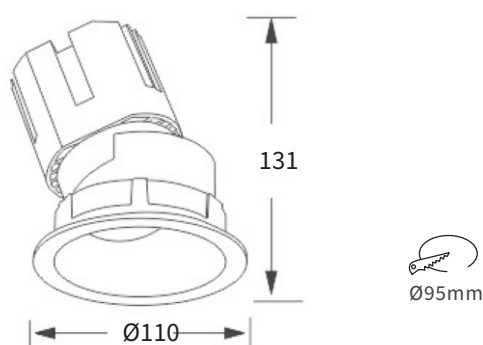

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	ACCESSORIES	
CRL 110	20 - 20W	(CT27)	2700K	15 - 15°	BK - Black	HCL - Honeycomb louver
		(CT30)	3000K	24 - 24°	WH - White	STL - Stretch lens
		(CT40)	4000K	38 - 38°	XX - Custom	SL - Soft lens
		(CT50)	5000K			CL - Clear lens

Sample: CRL 110 - 20 - CT27 - 15 - BK - HCL