

VICTORIA BOLLARD

VCT-BL



Mono IP65 CE IK08

YYZ Victoria Bollard is made of High corrosion resistance die-cast copper free aluminium body with polyester powder coating with phosphochromate prefinish. Curved reflector with tempered glass cover acts as optic. Stainless steel screws with silicone rubber gasket makes it ideal for use in harsh outdoor ambients.

FEATURES

HOUSING	Die-cast copper free aluminum
FINISH	Dark grey, Black
RATED POWER	8W, 15W, 20W, 25W
WORKING VOLTAGE	100-240V AC 50-60Hz
RADIANCE ANGLE	180°, 360°
MOUNTING	Surface mounted(Floor)
LAMP LIFE	L80 B50, 50,000 Hours
DIMENSIONS	Ø168x800, 1000(H)mm
OPERATION TEMP	-30° C - +50° C
CONTROL	On/Off
MacAdam	3SDCM, 2SDCM



NICHIA/CREE/SAMSUNG/LUMILEDS/OSRAM
LED Quality




240V AC
Working Voltage

8W/15W/20W/25W
Rated power

ELECTRICAL DATA

RATED POWER	8W, 15W, 20W, 25W
COLORS	3000K, 4000K, 6000K
CRI	80
LUMEN OUTPUT	59lm/W (180°), 70lm/W(360°)

DIMENSION

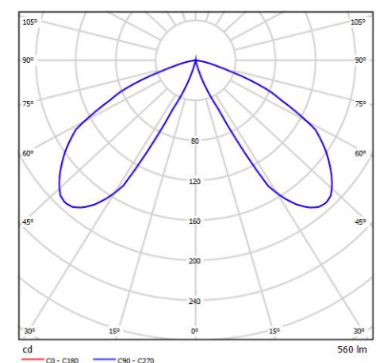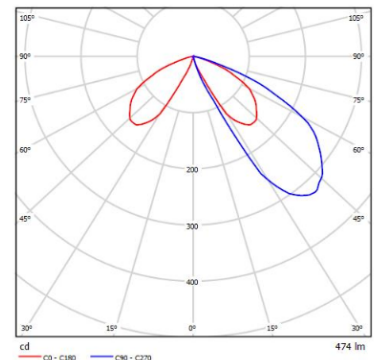

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	OPTIC	CONTROL	FINISH
VCT-BL	8 - 8W	(CT30) 3000K	180 - 180°	ND - Non Dimmable	DG - Dark Grey
	15 - 15W	(CT40) 4000K	360 - 360°	DA - Dali	BK - Black
	20 - 20W	(CT60) 6000K			
	25 - 25W				

Sample: VCT-BL - 8 - CT30 - 360 - ND - DG