

AVALANCHE-260 RGBW

AVL 260RGBW



YYZ Avalanche series is a Surface mounted flood luminaire with very low glare rating while reducing light pollution and specially designed for landscapes and in unique structure design shapes. They are made up of die-cast aluminum body and housing covered by anti-corrosion resistant with marine grade stainless steel. It can achieve the desired effect in a wide range of applications and can be applicable in highlighting architectural facades, landscapes, trees, etc



FEATURES

MATERIAL	Die-cast aluminum
FINISH	Black /White
RATED POWER	84W, 108W, 120W
WORKING VOLTAGE	24V DC, 100~277V AC, 50/60Hz
BEAM ANGLE	3°/7°/15°/40°/60°
MOUNTING	Surface mount
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	Ø260 x 155 x 344 mm
OPERATION TEMP	-30° C - +50° C
STORAGE TEMP	-20° C - +50° C
CONTROL	DMX

CREE/LUMILEDS
LED Quality


24V DC / 100~277VAC
Working Voltage

84W/108W/120W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	84W, 108W, 120W
SUPPLY VOLTAGE	100~277V AC, 50/60Hz
CRI	85+
COLORS	RGBW
LUMEN	85-95lm/W

DRAWING

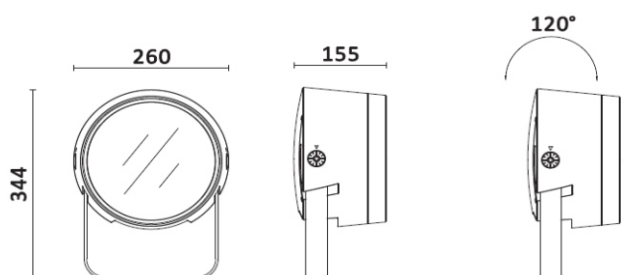

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	INPUT VOLTAGE	OPTIC	FINISH	CONTROL	ACCESSORIES	
AVL 260RGBW	84 - 84W	(RGBW) RGBW	DC - 24V DC	3 - 3°	BK - Black	DM - DMX	HCL - Honey Louver	
	108 - 108W		AC - 100~277VAC	7 - 7°	WH - White		CWL - Cowl	
	120 - 120W			15 - 15°				
					40 - 40°			
					60 - 60°			

Sample: AVL 260RGBW - 84 - CT27 - DC - 3 - BK - DM - HCL