

# PRIDE ADJUSTABLE

## PIE A98

Mono IP44 CE

YYZ Pride recessed downlights is a perfect choice for lighting projects that require superior visual comfort, efficiency, and high quality of light with white reflector. Boasting a UGR value of less than 19, these downlights provide excellent glare control and uniformity of illumination while maintaining a high level of visual comfort. This series of LED downlights is the ideal choice for lighting projects that demand a reliable, energy efficient solution with superior visual comfort and quality of light.

### FEATURES

HOUSING	Aluminum
FINISH	White, Black
RATED POWER	10W, 12W
WORKING CURRENT	800mA (10W), 350mA(12W)
RADIANCE ANGLE	15°, 30°, 50°, 60°
MOUNTING	Ceiling recessed
LAMP LIFE	50,000 hrs
DIMENSIONS	Ø88x98mm(Cutout Ø80mm)
OPERATION TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali



CITIZEN/PHILIPS LED Quality



800mA / 350mA Working Current

10W/12W Rated power

### ELECTRICAL DATA

RATED POWER	10W, 12W
COLORS	2700K, 3000K, 4000K, 5000K
CRI	90+
LUMEN OUTPUT	784lm @10W, 1124lm @ 12W

### DIMENSION

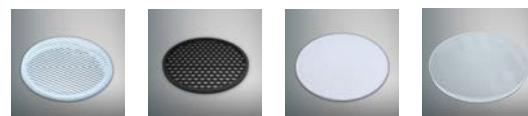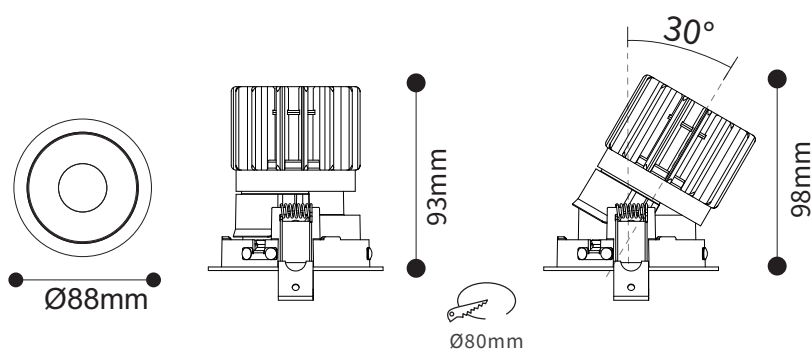

Striped glass    Honeycomb louver    Diffusion sheet    Woven glass

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CURRENT	BEAM ANGLE	FINISH	ACCESSORIES	
PIE A 98	10 - 10W	(CT27)	2700K	800 - 800mA(10W)	15 - 15°	WH - White BK - Black	SG - Striped glass
		(CT30)	3000K	350 - 350mA(12W)	30 - 30°		HL - Honeycomb louver
	(CT40)	4000K		50 - 50°	DS - Diffusion sheet		
	(CT50)	5000K		60 - 60°	WG - Woven glass		

Sample: PIE A 98 - 10 - CT27 - 800 - 15 - WH - SG