

# STENCIL

## STL

Mono IP50 CE

YYZ Stencil moderate opening size, with adequate projection brightness; Three layer embedded face ring Design, can ensure that the product in the horizontal direction to a certain Angle left and right oblique casting the shadow.



### FEATURES

MATERIAL	Aluminium
FINISH	White
RATED POWER	20W, 25W
WORKING VOLTAGE	110-240V AC
RADIANCE ANGLE	20°, 30°, 60°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø90, 110x192mm(cutout Ø75-95mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	Switched
OPTICS	Lens

CREE / OSRAM  
LED Quality


110-240V AC  
Working Voltage

20W / 25W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	20W, 25W
SUPPLY VOLTAGE	110-240V AC
COLORS	3000K, 8000K

### DIMENSION

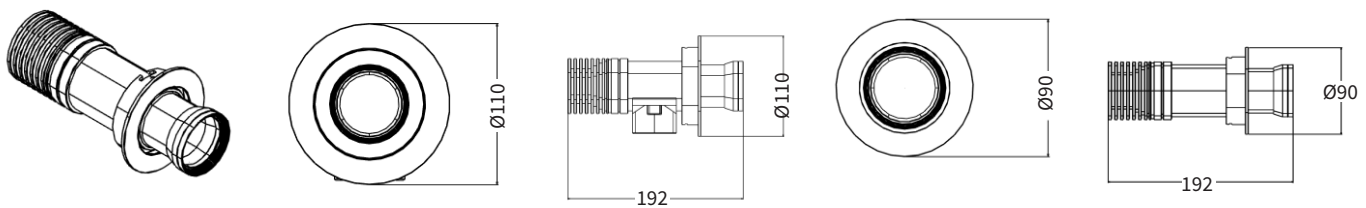

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	VOLTAGE	BEAM ANGLE	CUSTOM
STL	20 - 20W	(CT30)	SW - Switched	AC - 110-240V AC	20 - 20°	xx
	25 - 25W	(CT80)			30 - 30°	
					60 - 60°	

Sample: STL - 20 - CT30 - SW - AC - 20 - XX