LINEAR FLEX WASHER - LFW SERIES



-



YYZ LFW wall washer performs to give the ideal solution in achieving a flawless wall washing effect. Streamlined design with highly focussed and direction beam from a PMMA lens with silicone encapsulation. Backed with high quality aluminium profile for thermal management and adjustable brackets for effective installation.

Modular system available in standard lengths and can be customized as per project requirements. IP67 structural waterproof making it desirable for a wide range of applications like wall grazing, linear and indirect illumination for exterior architectural, retail and hospitality applications.

FEATURES

LED QUANTITY
BEAM ANGLE
AVAILABLE LENGTH
MOUNTING
OPERATION TEMP
LAMP LIFE

36 LED/mtr 35° 500mm, 1000mm, 2000mm, 3000mm, 4000mm, 5000mm, 10000mm Surface mounted -40° C - +50° C 50,000 hrs




ELECTRICAL DATA

POWER CONSUMPTION	20W/mtr
LED VOLTAGE	24V DC
COLORS	RGBW W-
CRI	80

W/mtr V DC GBW W-3000K

DIMENSION



ORDERING LOGIC

PRODUCT	OPTIC			COLOR TEN	IPERATURE	VOLTAGE	STRIP LENGTH		BARE PROFILE			CUSTOM
LINEAR FLEX WASHER - (LFW)	35	-	35°	(RGBW)	RGBW	24 - 24VDC	500 -	500	500	-	500mm	ХХ
	ХХ	-	CUSTOM				1000 -	1000	1000	-	1000mm	
							2000 -	2000	2000	-	2000mm	
							3000 -	3000	XX	-	CUSTOM	
							4000 -	4000				
							5000 -	5000				
							10000 -	10000				
Sample: LFW - 35 - RGBW - 24 - 50	0 - 50	0 - XX					XX -	CUSTOM				

LINEAR FLEX WASHER - LFW SERIES



LFW



PC Cover



Aluminum profile



End Cap



Metal mounting clip



2 PIN join connector

2 PIN Male Connection Cable




2 PIN Female Connection Cable




UV light

LIGHT DISTRIBUTION CURVE

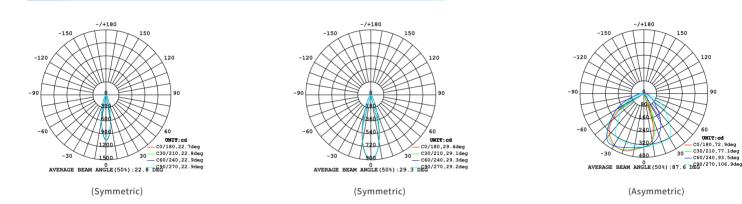

INSTALLATION

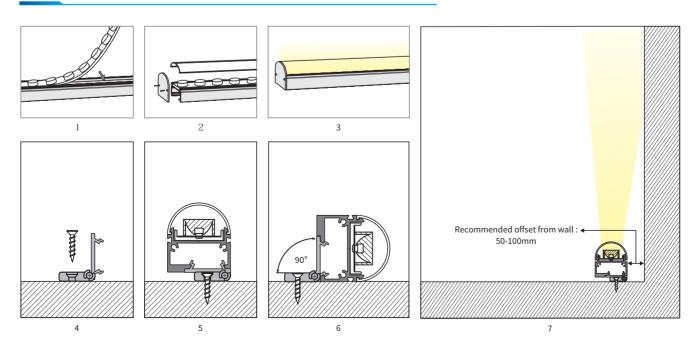



LFW

INSTALLATION (Contd.)

