

# MARKER MINI 64

## MKR-MI 64

**Mono** IP67 CE

Sturdy and sleek inground fitting made of 316 grade stainless steel designed to withstand high salinity environment. Available in specially engineered 4 different optical distribution to ensure utmost design flexibility and minimum glare.



### FEATURES

MATERIAL	Stainless steel 316 grade
FINISH	Stainless steel
RATED POWER	3W, 5W
RADIANCE ANGLE	15°, 20°, 40°
MOUNTING	Floor recessed
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø64x74mm
OPERATING TEMP	-20° C - +50° C
CONTROL	DMX
OPTICS	Lens
SDCM	2

CREE / OSRAM  
LED Quality


24V DC

3W/5W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	3W, 5W
COLORS	RGB, RGBW
CRI	>90

### DIMENSION

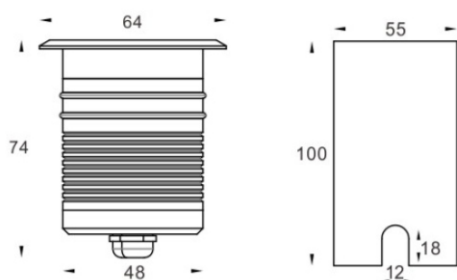

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE		CONTROL	BEAM ANGLE	FINISH	CUSTOM
MKR-MI 64	3 - 3W	(RGB)	RGB	DX - DMX	15 - 15°	SS - Stainless steel	xx
	5 - 5W	(RGBW)	RGBW		20 - 24°		
					40 - 38°		

Sample: MKR-MI 64 - 3W - RGB - DX- 15 - SS - XX