

# GRAVITY - 562 SERIES

## GTY 562-RGB/RGBW



Gravity 562 Series is a high-power Osram LED inground uplight luminaire specially designed for architectural facades and general uplighting. Crafted with a die-cast aluminum Housing, this inground luminaire offers exceptional durability with an IP68 (not for underwater use) and IK10 rating, as well as drive-over capability up to 5000kg @ 20km/hr. A wide range of lighting solutions, accentuating trees, buildings, and walls with dramatic highlighting. With superior finishing and high efficiency, this exterior inground uplight delivers soft and uniform illumination, seamlessly blending into the surrounding space to maximize its aesthetic appeal. Featuring high-quality optical systems and direct lighting capabilities, this product achieves the desired effect in various applications. RGBW version is also available in one wattage and beam angle.



### FEATURES


HOUSING	Die-cast aluminum housing
FINISH	Black. Trim Stainless Steel finish
RATED POWER	12W, 30W, 36W
BEAM ANGLE	7°, 15°, 30°, 45°, 60°, 15° x 60°
LAMP LIFE	50,000 hrs
MOUNTING	Floor recessed
DIMENSIONS	Ø260 x 119mm
OPERATION TEMP	-40° C - +50° C
CONTROL	DMX

- CREE/LUMILEDS/CITIZEN  
LED Quality
- 24V DC / 100-240V AC  
Working Voltage
- 12W, 30W, 36W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	12W, 30W, 36W
SUPPLY VOLTAGE	24V DC, 100-240V AC
COLORS	RGB, RGBW
LUMEN	660 ~ 750lm @ 30W RGB, 792 ~ 900lm @ 36W RGB 30lm/W- RGBW

### DIMENSIONS

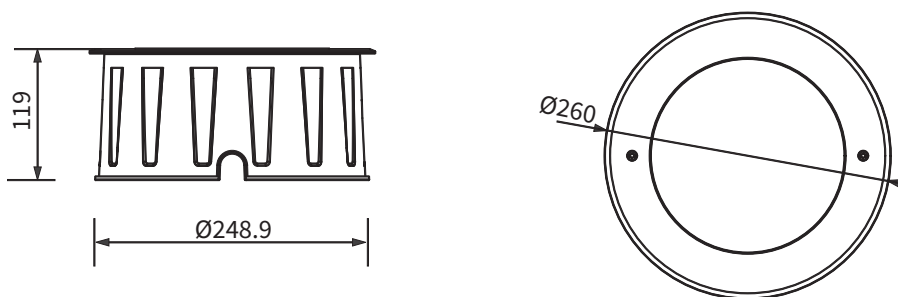

#### Accessories



Bullseyes Louvre



Honeycomb Louvre

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	VOLTAGE	CONTROL	FINISH	ACCESSORIES
GTY 562	12 - 12W	(RGB) - RGB	7 - 7°	DC - 24V DC	DM - DMX512	BK - Black	HCL - Honeycomb Louvre
	30 - 30W	(RGBW) - RGBW	15 - 15°	AC - 220-240V AC			BEL - Bullseyes Louvre
	36 - 36W			30 - 30°			NA - No Accessory
				45 - 45°			
				60 - 60°			
			15x60 - 15°x60°				

Sample: GTY 562 - 12 - RGB - 15 - AC - DM - BK - HCL