

APERTURE-30


APR 30

Mono IP20 CE

YYZ Aperture 30 is a surface, recessed and pendant mounted light made of extruded architectural grade T6061 aluminum. It is equipped with high power LED light source and optical lens with a wide range of color temperature which provide superior color consistency and high CRI. This linear LED luminaire is designed to produce a uniform distribution of diffused light and is suitable for ceiling and wall.

FEATURES

HOUSING	Extruded aluminium
FINISH	White, Grey, Black
BEAM ANGLE	120°
MOUNTING	Pendant, Recessed, Surface mounting
OPTIC	PMMA Milky, PMMA Black
DIMENSIONS	100x40x70mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
CONTROL	On/Off, Dali, 1-10V



CREE/SAMSUNG
LED Quality



220-240V AC
Working Voltage

15W/mtr, 20W/mtr, 25W/mtr, 30W/mtr
Rated power



ELECTRICAL DATA

RATED POWER	15W/mtr, 20W/mtr, 25W/mtr, 30W/mtr
COLORS	3000K, 4000K, 5000K
CRI	90
LUMEN	90 lm/W

DIMENSION

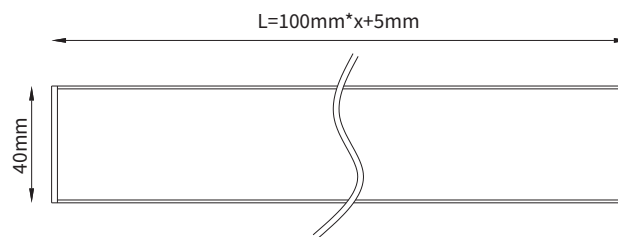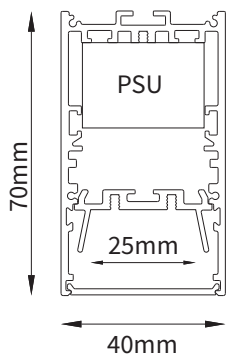

Accessories

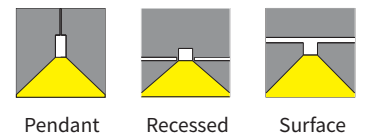

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	FINISH	MOUNTING	ACCESSORIES	
APR 30	15 - 15W/mtr	(CT30)	3000K	SW - ON-OFF	WH - White	PE - Pendant	HCL - Honey Comb Louver
	20 - 20W/mtr	(CT40)	4000K	AN - 0-10V	BK - Black	RE - Recessed	
	25 - 25W/mtr	(CT50)	5000K	DA - DALI	GR - Grey	SU - Surface	
	30 - 30W/mtr						

Sample: APR 30 - 30 - CT27 - SW - WH - PE - HCL