

# SPIKE LIGHT SPEC SHEET

SPL-7

Mono IP65 CE

YYZ Spike light is a high brightness luminaire in power LED version providing precision optical systems which gives very low glare rating, while reducing light pollution and specially designed for landscapes and in unique structural design shape. These luminaires are designed to offer functional, a wide range of lighting solutions and dramatic highlighting of the architectural facades, landscapes, trees through the superior finishing as well highest efficiency with a long service life. This exterior ground spike luminaires are made in aluminum body and can achieve the desired effect in a wide range of applications with high quality optical systems and for direct lighting.

## SPECIFICATION

OPERATING VOLTAGES	24 V DC
RATED POWER	7W
LED SOURCE	COB
LED QUANTITIES	1 LEDs
CCT	2700K, 3000K, 4000K
BEAM ANGLE	12°, 24°, 38°, 50°
CRI	≥90
LAMP LIFE	50,000 hrs
CONTROL	Switched, 0-10V Dimming, DALI
DIMENSIONS	Ø2.13 in. (D) x 3.58 in. (L) x 11.06 in. (H) Ø54mm (D) x 91mm (W) x 281mm (H)
BODY MATERIAL	Aluminum alloy
COLOR FINISH	Black, white
FIXTURE CONNECTION	Circular waterproof connector
MOUNTING OPTIONS	Spike mounted
OPERATING TEMPERATURE	-20°C to + 50°C
AVAILABLE IP RATING	IP65
WARRANTY	5 years


 CITIZEN  
LED Quality

 24V DC  
Working Voltage

 7W  
Rated power



## DIMENSIONS

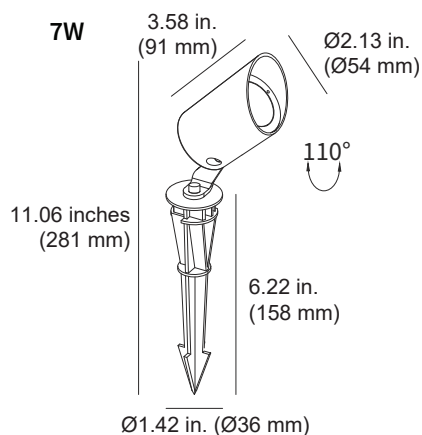

## ORDERING CODE

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	BEAM ANGLE	VOLTAGE	FINISH	CUSTOM
SPL 7	7W - 7W	CT27	2700K	SW - Switched	12D - 12°	BK - Black WH - White	XX - XX
		CT30	3000K	DA - Dali	24D - 24°		
		CT40	4000K	AN - 1-10V	38D - 38°		
					50D - 50°		

Sample:SPL7-7W-CT30-SW-38D-24-BK-XX