WET RATED LFX COB SERIES











cULUS C € 8.0W

YYZ LFX COB IP54 series features excellent homogenous light, without visible light points. The COB strip is a high-density led lighting strip made by COB encapsulation, which can reduce the thermal resistance of the high-density strip circuit system, greatly improves the life of the LED, and the light flux density is high, the glare is small, and the light is uniform. These series is perfect for indirect lighting and hence used in offices, residential interiors, furniture, or places which require large luminous surface.



FEATURES

LIGHT SOURCE СОВ

LED QUANTITY 320 Leds / mtr **FINISH** White PCB WORKING VOLTAGE 24 Volts RATED POWER 8W / mtr RADIANCE ANGLE 180° LAMP LIFE 50000 hrs

MOUNTING 3M Tape on the back CONNECTION Hardwired tails **CUTTING INCREMENTS** Every 50mm **DIMENSIONS** 5000 x 8mm MAX DAISY RUN 5 mtr













ELECTRICAL DATA

POWER CONSUMPTION 8.0W SUPPLY VOLTAGE 24 Vdc SUPPLY CURRENT 240V ac

2700K, 3000K, 4000K, 5000K, 6000K **COLORS**

CRI

LUMEN 800-1000lm

ORDERING LOGIC

PRODUCT SERIES	ТҮРЕ	POWER	COLOR TEMPERA	TURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	РСВ	CRI	NO OF LED ROWS	CONNECTION	
LFX	W - WetRated (IP54)	08.00 - 8.0W	(CT30) 3 (CT40) 4 (CT50) 5	5000K	СОВ	Z3	320 - 320 LEDs/mtr	24-24V	CV-Constant voltage	08 - 8mm	H - HIGH (90)	1	HT - Hardwire OC - Outdoor	
			(CT60) 6						MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL
									R - Regular	M - Mono	Т - Тор	L - Low	W - White	L05 - 5mtr

Sample: LFX - W - 08.00 - CT 27 - COB - Z3 - 320 - 24 - CV - 08 - H -1 - HT - RMTLWL05


Page 1 of 2








DIMENSIONS

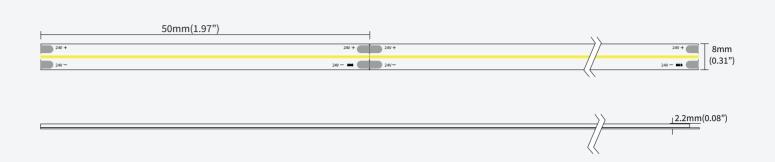

BINNING DIAGRAM

BIN Details



ACCESSORIES

Surface mounted









2020

Hanging installation

2020B

1616



Corner installation

Recessed installation



Built-in installation